
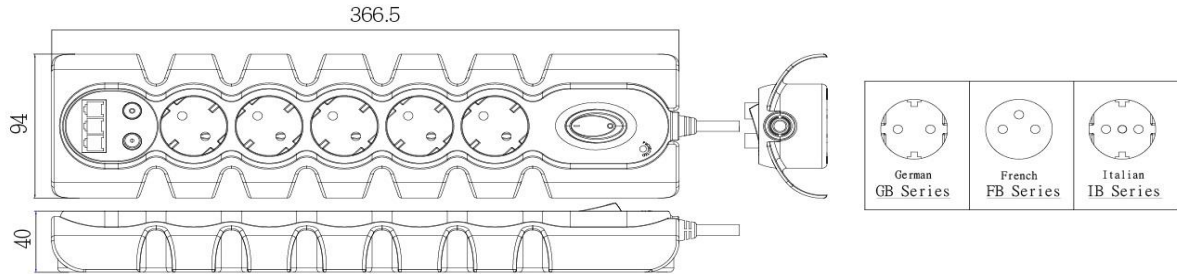




Heavy Duty 6 Outlets Power Surge Protector

Part No.	GB-21K	GB-21K-1B	GB-21K-3B
Electrical rating	250V/10A /2500W	250V/10A /2500W	250V/10A /2500W
Housing Material	Plastic	Plastic	Plastic
AC Outlets	6	6	6
AC Outlet Type	Schuko	Schuko	Schuko
Plug type	Schuko	Schuko	Schuko
AC Cord Specs	H05VV-F 3G 1.00MM ² / H05VV-F 3G 1.50MM ²	H05VV-F 3G 1.00MM ² / H05VV-F 3G 1.50MM ²	H05VV-F 3G 1.00MM ² / H05VV-F 3G 1.50MM ²
Power Cord Length	1.8m	1.8m	1.8m
Overload Protection	10 Amps	10 Amps	10 Amps
Circuit Breaker Switch	Yes	Yes	Yes
Power Shutdown Protection	N/A	N/A	N/A
Max. Joules Rating	N/A	380 Joules	1140 Joules
Max. Spike Current	N/A	6500A	19500A
Max, Spike Voltage	N/A	6000V	6000V
Clamping Voltage (VPR)	N/A	1000V	1000V
Response Time	N/A	< 1 nanosecond	< 1 nanosecond
Surge Protection Indicator	N/A	N/A	Yes
Grounded Indicator	N/A	N/A	N/A
EMI/ RFI Noise Filter	N/A	N/A	Attenuation Up to 20 dB Freq. 150Khz to 30Mhz
USB Charger	N/A	N/A	N/A
Phone/Network Protector	N/A	N/A	N/A
Coax Protection	N/A	N/A	N/A
Product Dimension	L366.5xW94xHmm	L366.5xW94xHmm	L366.5xW94xHmm

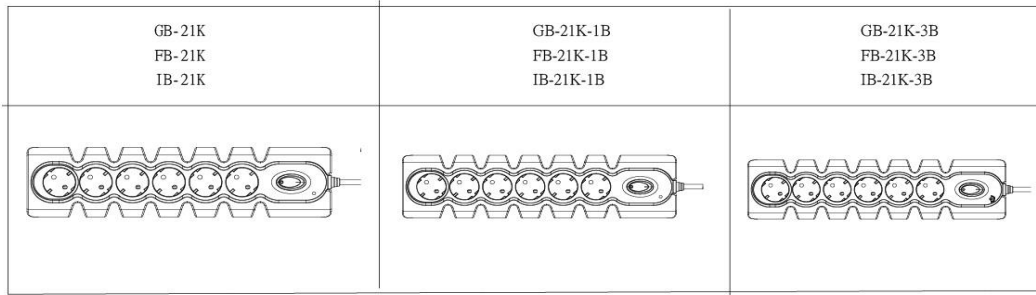

Heavy Duty 6 Outlets Power Surge Protector

Part No.	FB-21K	FB-21K-1B	FB-21K-3B
Electrical rating	250V/10A /2500W	250V/10A /2500W	250V/10A /2500W
Housing Material	Plastic	Plastic	Plastic
AC Outlets	6	6	6
AC Outlet Type	French	French	French
Plug type	French	French	French
AC Cord Specs	H05VV-F 3G 1.00MM ² / H05VV-F 3G 1.50MM ²	H05VV-F 3G 1.00MM ² / H05VV-F 3G 1.50MM ²	H05VV-F 3G 1.00MM ² / H05VV-F 3G 1.50MM ²
Power Cord Length	1.8m	1.8m	1.8m
Overload Protection	10 Amps	10 Amps	10 Amps
Circuit Breaker Switch	Yes	Yes	Yes
Power Shutdown Protection	N/A	N/A	N/A
Max. Joules Rating	N/A	380 Joules	1140 Joules
Max. Spike Current	N/A	6500A	19500A
Max, Spike Voltage	N/A	6000V	6000V
Clamping Voltage (VPR)	N/A	1000V	1000V
Response Time	N/A	< 1 nanosecond	< 1 nanosecond
Surge Protection Indicator	N/A	N/A	Yes
Grounded Indicator	N/A	N/A	N/A
EMI/ RFI Noise Filter	N/A	N/A	Attenuation Up to 20 dB Freq. 150Khz to 30Mhz
USB Charger	N/A	N/A	N/A
Phone/Network Protector	N/A	N/A	N/A
Coax Protection	N/A	N/A	N/A
Product Dimension	L366.5xW94xHmm	L366.5xW94xHmm	L366.5xW94xHmm

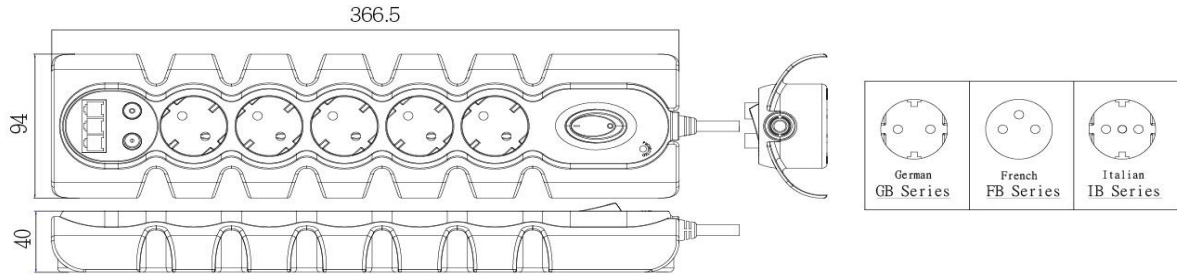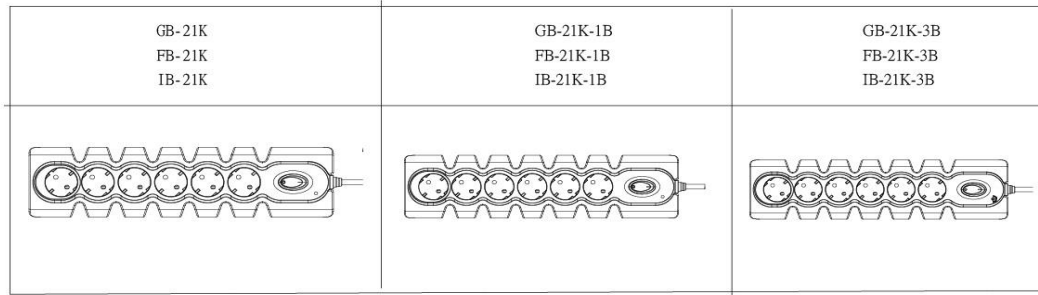

Heavy Duty 6 Outlets Power Surge Protector

Part No.	IB-21K	IB-21K-1B	IB-21K-3B
Electrical rating	250V/10A /2500W	250V/10A /2500W	250V/10A /2500W
Housing Material	Plastic	Plastic	Plastic
AC Outlets	6	6	6
AC Outlet Type	Italian	Italian	Italian
Plug type	Italian	Italian	Italian
AC Cord Specs	H05VV-F 3G 1.00MM ² / H05VV-F 3G 1.50MM ²	H05VV-F 3G 1.00MM ² / H05VV-F 3G 1.50MM ²	H05VV-F 3G 1.00MM ² / H05VV-F 3G 1.50MM ²
Power Cord Length	1.8m	1.8m	1.8m
Overload Protection	10 Amps	10 Amps	10 Amps
Circuit Breaker Switch	Yes	Yes	Yes
Power Shutdown Protection	N/A	N/A	N/A
Max. Joules Rating	N/A	380 Joules	1140 Joules
Max. Spike Current	N/A	6500A	19500A
Max, Spike Voltage	N/A	6000V	6000V
Clamping Voltage (VPR)	N/A	1000V	1000V
Response Time	N/A	< 1 nanosecond	< 1 nanosecond
Surge Protection Indicator	N/A	N/A	Yes
Grounded Indicator	N/A	N/A	N/A
EMI/ RFI Noise Filter	N/A	N/A	Attenuation Up to 20 dB Freq. 150Khz to 30Mhz
USB Charger	N/A	N/A	N/A
Phone/Network Protector	N/A	N/A	N/A
Coax Protection	N/A	N/A	N/A
Product Dimension	L366.5xW94xHmm	L366.5xW94xHmm	L366.5xW94xHmm