


6 Outlet Surge Protector

Part No.	FS-040-A (94101)	FS-040-B (94102)	FS-040-C (94103)	FS-040-D (94104)
Electrical rating	125V/15A /1875W	125V/15A /1875W	125V/15A /1875W	125V/15A /1875W
Housing Material	Plastic	Plastic	Plastic	Plastic
AC Outlets	6	6	6	6
AC Outlet Type	Nema 5-15R	Nema 5-15R	Nema 5-15R	Nema 5-15R
Plug type	Nema 5-15P	Nema 5-15P	Nema 5-15P	Nema 5-15P
AC Cord Specs	SJT ; 14AWG	SJT ; 14AWG	SJT ; 14AWG	SJT or SJT-B; 14AWG
Power Cord Length	Min.1.5ft~ Max.25ft	Min.1.5ft~ Max.25ft	Min.1.5ft~ Max.25ft	Min.1.5ft~ Max.25ft
Overload Protection	15 Amps	15 Amps	15 Amps	15 Amps
Circuit Breaker Switch	Yes	Yes	Yes	Yes
Power Shutdown Protection	Yes	Yes	Yes	Yes
Max. Joules Rating	750 Joules	1000 Joules	1250 Joules	1350 Joules
Max. Spike Current	13500A	18000 Amps	22500 Amps	24500 Amps
Max, Spike Voltage	6000V	6000V	6000V	6000V
Clamping Voltage (VPR)	500 (L-N,L-G, N-G)	500V (L-N, L-G, N-G)	500V (L-N, L-G, N-G)	500 (L-N,L-G, N-G)
Response Time	< 1 nanosecond	< 1 nanosecond	< 1 nanosecond	< 1 nanosecond
Surge Protection Indicator	Yes	Yes	Yes	Yes
Wire Fault Indicator	Yes	Yes	Yes	Yes
EMI/ RFI Noise Filter	Attenuation Up to 20 dB Freq. 150Khz to 30Mhz	Attenuation Up to 20 dB Freq. 150Khz to 30Mhz	Attenuation Up to 20 dB Freq. 150Khz to 30Mhz	Attenuation Up to 20 dB Freq. 150Khz to 30Mhz
USB Charger	N/A	N/A	N/A	N/A
Phone/Network Protector	N/A	N/A	N/A	RJ11 : 1 in-1 out
Coax Protection	N/A	N/A	N/A	N/A
Product Dimension	L302 xW100 x H47mm	L302 xW100 x H47mm	L302 xW100 x H47mm	L302 xW100 x H47mm

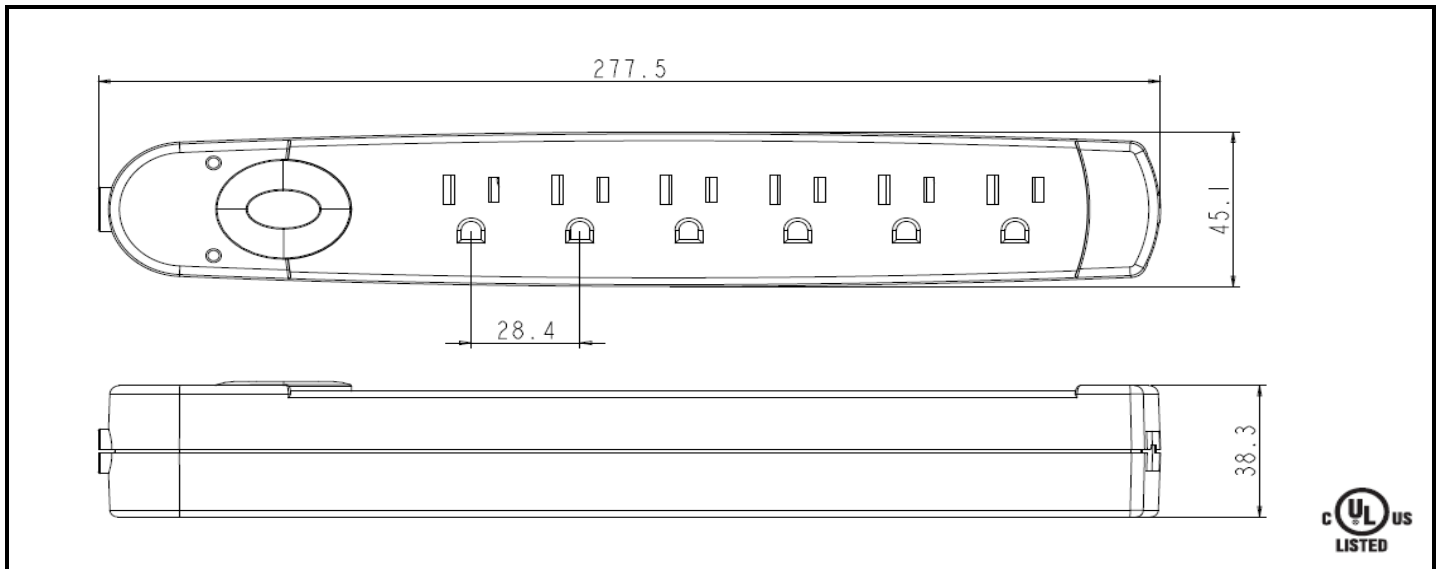

6 Outlet Surge Protector

Part No.	FS-040-E (94105)	FS-040-F (94016)	FS-040-G (94018)	FS-040-H (94040)
Electrical rating	125V/15A /1875W	125V/15A /1875W	125V/15A /1875W	125V/15A /1875W
Housing Material	Plastic	Plastic	Plastic	Plastic
AC Outlets	6	6	6	6
AC Outlet Type	Nema 5-15R	Nema 5-15R	Nema 5-15R	Nema 5-15R
Plug type	Nema 5-15P	Nema 5-15P	Nema 5-15P	Nema 5-15P
AC Cord Specs	SJT ; 14AWG	SJT ; 14AWG	SJT ; 14AWG	SJT ; 14AWG
Power Cord Length	Min.1.5ft~ Max.25ft	Min.1.5ft~ Max.25ft	Min.1.5ft~ Max.25ft	Min.1.5ft~ Max.25ft
Overload Protection	15 Amps	15 Amps	15 Amps	15 Amps
Circuit Breaker Switch	Yes	Yes	Yes	Yes
Power Shutdown Protection	Yes	Yes	Yes	Yes
Max. Joules Rating	1350 Joules	1650 Joules	1650 Joules	1650 Joules
Max. Spike Current	24500 Amps	30000 Amps	30000 Amps	30000 Amps
Max. Spike Voltage	6000V	6000V	6000V	6000V
Clamping Voltage (VPR)	500 (L-N,L-G, N-G)	500V (L-N, L-G, N-G)	500V (L-N, L-G, N-G)	500 (L-N,L-G, N-G)
Response Time	< 1 nanosecond	< 1 nanosecond	< 1 nanosecond	< 1 nanosecond
Surge Protection Indicator	Yes	Yes	Yes	Yes
Wire Fault Indicator	Yes	Yes	Yes	Yes
EMI/ RFI Noise Filter	Attenuation Up to 20 dB Freq. 150Khz to 30Mhz	Attenuation Up to 45 dB Freq. 150Khz to 30Mhz	Attenuation Up to 45 dB Freq. 150Khz to 30Mhz	Attenuation Up to 45 dB Freq. 150Khz to 30Mhz
USB Charger	N/A	N/A	N/A	N/A
Phone/Network Protector	N/A	N/A	N/A	RJ11 : 1 in-1 out
Coax Protection	F Connector	N/A	F Connector	N/A
Product Dimension	L302 xW100 x H47mm	L302 xW100 x H47mm	L302 xW100 x H47mm	L302 xW100 x H47mm